





Accessories
Hood(Optional)

Tie is a simple design wall lamp, available in square and round appearance. It is composed of die-casting aluminum, reflective cup and tempered glass. with high-quality outdoor special powder spraying process which can make the lamp have a Tough weather resistance and anti-aging functions, and the protection grade is IP65.

Tie series wall lamp adopts deep anti-glare reflective cup, with direct and indirect light, which can provide a variety of light emission angles to meet the needs of various scenes, it is with comfortable vision and without light spot. There are optional accessories optional, which makes the lamp have excellent anti-glare performance. The lamp housing is with integrally die-cast aluminum, and has good heat dissipation performance. Optional DALI2, wireless intelligent dimming and other functions are optional, it is with built-in waterproof terminals, which is convenient for installation and maintenance.



We provide 5 years warranty the lamp can be used as indoor and outdoor facade lighting, architectural decorative lighting, etc.

Technical data

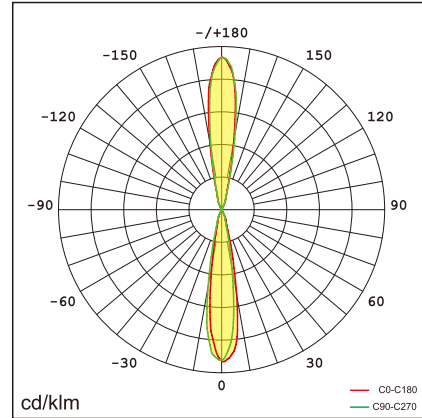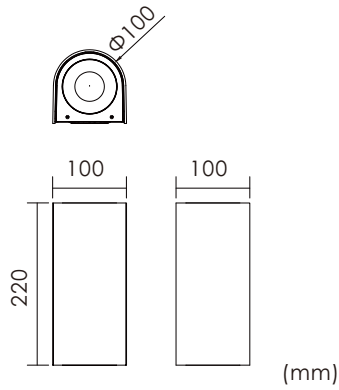



Item No.	B4TR0-24322-NN	B4TR0-24322-DN	B4TR0-24522-NN	B4TR0-24522-DN
Input Power	24W		24W	
Input Voltage	AC220~240V		AC220~240V	
Power Factor	≥ 0.9		≥ 0.9	
Luminous Flux($\pm 5\%$)	1825 lm		2350 lm	
Colour temperature	3000K		4000K	
Beam Angle	$\downarrow 18^\circ/18^\circ\uparrow$		$\downarrow 18^\circ/18^\circ\uparrow$	
Color Rendering Index	> 80		> 80	
Life Time	L70(B50)50,000H		L70(B50)50,000H	
Colour consistency SDCM	< 3		< 3	
Dimming	NO	DALI	NO	DALI
Housing Color	Black/Silver		Black/Silver	
Fixture Materia	6063AL		6063AL	
Protection Level	IP65/IK07		IP65/IK07	
Storage Temperature	$-30^\circ\text{C}\sim+60^\circ\text{C}$		$-30^\circ\text{C}\sim+60^\circ\text{C}$	
Working Temperature	$-30^\circ\text{C}\sim+45^\circ\text{C}$		$-30^\circ\text{C}\sim+45^\circ\text{C}$	
Net Weight	1.65kg		1.65kg	
Size	100*100*220mm		100*100*220mm	
Package size	400*400*315mm (9 PCS)		400*400*315mm (9 PCS)	
20GP	4410 PCS		4410 PCS	
40GP	9450 PCS		9450 PCS	

Technical data

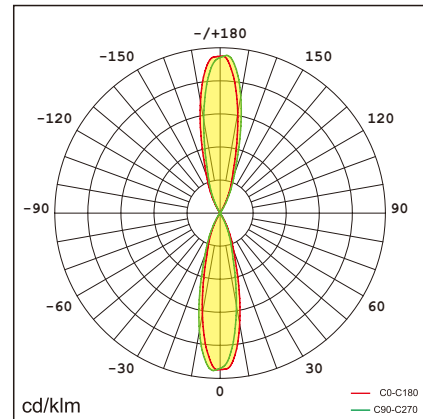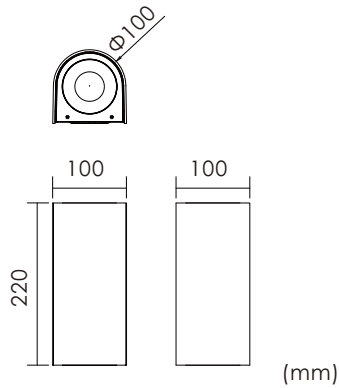



Item No.	B4TR0-24333-NN	B4TR0-24333-DN	B4TR0-24533-NN	B4TR0-24533-DN
Input Power	24W		24W	
Input Voltage	AC220~240V		AC220~240V	
Power Factor	≥0.9		≥0.9	
Luminous Flux(±5%)	1825 lm		2350 lm	
Colour temperature	3000K		4000K	
Beam Angle	↓24°/24°↑		↓24°/24°↑	
Color Rendering Index	>80		>80	
Life Time	L70(B50)50,000H		L70(B50)50,000H	
Colour consistency SDCM	<3		<3	
Dimming	NO	DALI	NO	DALI
Housing Color	Black/Silver		Black/Silver	
Fixture Materia	6063AL		6063AL	
Protection Level	IP65/IK07		IP65/IK07	
Storage Temperature	-30°C~+60°C		-30°C~+60°C	
Working Temperature	-30°C~+45°C		-30°C~+45°C	
Net Weight	1.65kg		1.65kg	
Size	100*100*220mm		100*100*220mm	
Package size	400*400*315mm (9 PCS)		400*400*315mm (9 PCS)	
20GP	4410 PCS		4410 PCS	
40GP	9450 PCS		9450 PCS	

Technical data

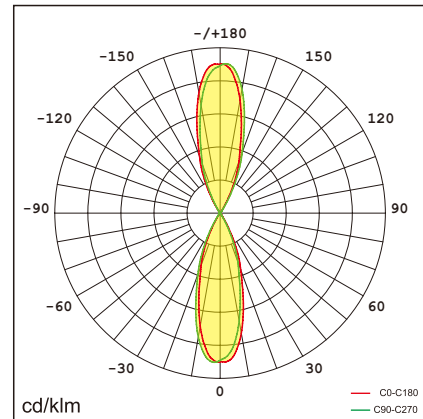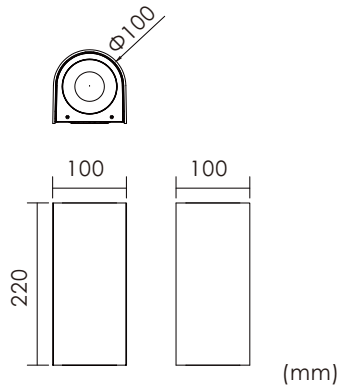



Item No.	B4TR0-24344-NN	B4TR0-24344-DN	B4TR0-24544-NN	B4TR0-24544-DN
Input Power	24W		24W	
Input Voltage	AC220~240V		AC220~240V	
Power Factor	≥0.9		≥0.9	
Luminous Flux(±5%)	1825 lm		2350 lm	
Colour temperature	3000K		4000K	
Beam Angle	↓ 36°/36°↑		↓ 36°/36°↑	
Color Rendering Index	>80		>80	
Life Time	L70(B50)50,000H		L70(B50)50,000H	
Colour consistency SDCM	<3		<3	
Dimming	NO	DALI	NO	DALI
Housing Color	Black/Silver		Black/Silver	
Fixture Materia	6063AL		6063AL	
Protection Level	IP65/IK07		IP65/IK07	
Storage Temperature	-30°C~+60°C		-30°C~+60°C	
Working Temperature	-30°C~+45°C		-30°C~+45°C	
Net Weight	1.65kg		1.65kg	
Size	100*100*220mm		100*100*220mm	
Package size	400*400*315mm (9 PCS)		400*400*315mm (9 PCS)	
20GP	4410 PCS		4410 PCS	
40GP	9450 PCS		9450 PCS	

Technical data

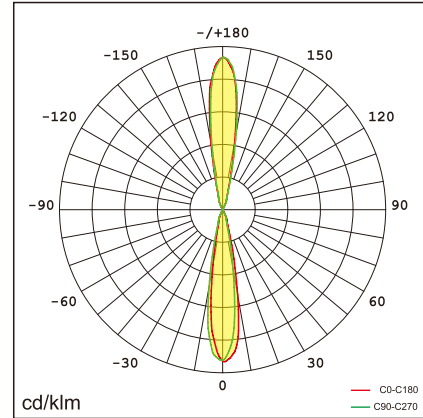
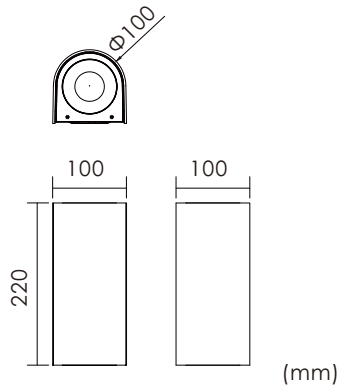


Item No.	B4TR0-43322-NN	B4TR0-43322-DN	B4TR0-43522-NN	B4TR0-43522-DN
Input Power	43W		43W	
Input Voltage	AC220~240V		AC220~240V	
Power Factor	≥0.9		≥0.9	
Luminous Flux(±5%)	2930 lm		3080 lm	
Colour temperature	3000K		4000K	
Beam Angle	↓ 18°/18°↑		↓ 18°/18°↑	
Color Rendering Index	>80		>80	
Life Time	L70(B50)50,000H		L70(B50)50,000H	
Colour consistency SDCM	<3		<3	
Dimming	NO	DALI	NO	DALI
Housing Color	Black/Silver		Black/Silver	
Fixture Materia	6063AL		6063AL	
Protection Level	IP65/IK07		IP65/IK07	
Storage Temperature	-30°C~+60°C		-30°C~+60°C	
Working Temperature	-30°C~+45°C		-30°C~+45°C	
Net Weight	1.65kg		1.65kg	
Size	100*100*220mm		100*100*220mm	
Package size	400*400*315mm (9 PCS)		400*400*315mm (9 PCS)	
20GP	4410 PCS		4410 PCS	
40GP	9450 PCS		9450 PCS	

Technical data

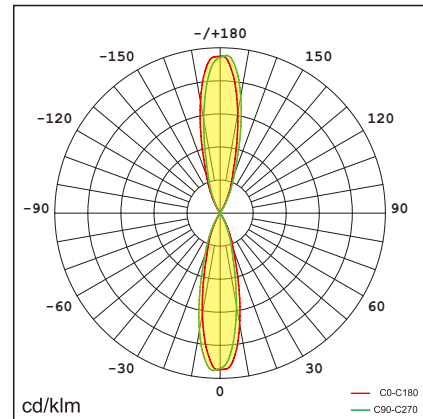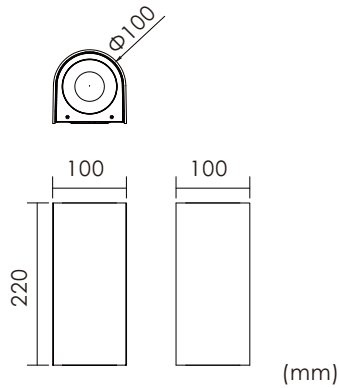

Item No.	B4TR0-43333-NN	B4TR0-43333-DN	B4TR0-43533-NN	B4TR0-43533-DN
Input Power	43W		43W	
Input Voltage	AC220~240V		AC220~240V	
Power Factor	≥0.9		≥0.9	
Luminous Flux(±5%)	2930 lm		3080 lm	
Colour temperature	3000K		4000K	
Beam Angle	↓24°/24°↑		↓24°/24°↑	
Color Rendering Index	>80		>80	
Life Time	L70(B50)50,000H		L70(B50)50,000H	
Colour consistency SDCM	<3		<3	
Dimming	NO	DALI	NO	DALI
Housing Color	Black/Silver		Black/Silver	
Fixture Materia	6063AL		6063AL	
Protection Level	IP65/IK07		IP65/IK07	
Storage Temperature	-30°C~+60°C		-30°C~+60°C	
Working Temperature	-30°C~+45°C		-30°C~+45°C	
Net Weight	1.65kg		1.65kg	
Size	100*100*220mm		100*100*220mm	
Package size	400*400*315mm (9 PCS)		400*400*315mm (9 PCS)	
20GP	4410 PCS		4410 PCS	
40GP	9450 PCS		9450 PCS	

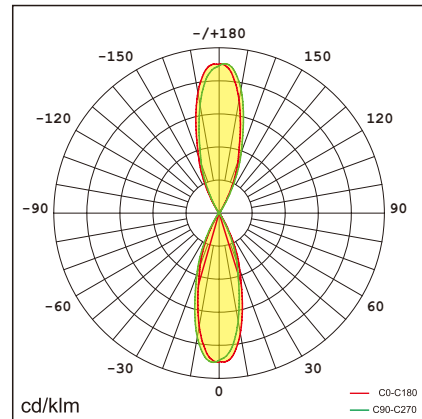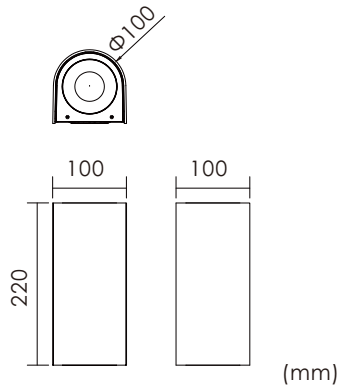

Item No.	B4TR0-43344-NN	B4TR0-43344-DN	B4TR0-43544-NN	B4TR0-43544-DN
Input Power	43W		43W	
Input Voltage	AC220~240V		AC220~240V	
Power Factor	≥0.9		≥0.9	
Luminous Flux(±5%)	2930 lm		3080 lm	
Colour temperature	3000K		4000K	
Beam Angle	↓36°/36°↑		↓36°/36°↑	
Color Rendering Index	>80		>80	
Life Time	L70(B50)50,000H		L70(B50)50,000H	
Colour consistency SDCM	<3		<3	
Dimming	NO	DALI	NO	DALI
Housing Color	Black/Silver		Black/Silver	
Fixture Materia	6063AL		6063AL	
Protection Level	IP65/IK07		IP65/IK07	
Storage Temperature	-30°C~+60°C		-30°C~+60°C	
Working Temperature	-30°C~+45°C		-30°C~+45°C	
Net Weight	1.65kg		1.65kg	
Size	100*100*220mm		100*100*220mm	
Package size	400*400*315mm (9 PCS)		400*400*315mm (9 PCS)	
20GP	4410 PCS		4410 PCS	
40GP	9450 PCS		9450 PCS	

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

